



D2 TURBO AND D2 TURBO LOW-VOLTAGE CONTROLLER FEATURES

Hardware features

- Fully-sealed plastic housing for controller to prevent ingress of dirt and insects
- Easy setup of controller using the Function and Setting Dials and the pushbutton
- Removable connectors on controller for easy maintenance
- Watchdog IC ensures full and safe operation of the controller
- Optional Backup Memory Module allows backing up of all the information that has been set up in the system
- Robust steel pinion to ensure long and reliable operation

Electronic features

- Opening and closing safety beam inputs with Beam Circuit functional test ¹
- High-security Autoclose in conjunction with safety beams (PIRAC) ¹
- Multiple Modes of Operation: Standard Mode, Open Only Mode (multi-user), Reversing Mode, and two Pre-flashing Modes
- Automatic closing with adjustable time delay, and pushbutton override
- Remote gate-status indicator (gate position, power failure, Low-battery, Multiple Collision Detection and Pillar Light status indication) ²
- Pedestrian Opening ³ (with adjustable Autoclose time)
- Holiday Lockout ³
- Courtesy (Pillar) Light Timer (fixed duration), with Pre-delays and two Pre-flashing Modes ⁴
- Selectable gate speed modes - Low Speed/High Speed (High Speed is the default)
- Positive Close Mode (e.g. ensure activation of electric fence contact switch)
- Onboard multichannel CENTURION code-hopping receiver with the ability to learn remote control buttons to specific functions (e.g. Gate trigger, Pedestrian opening, Holiday Lockout)
- D2 Turbo Low-Voltage controller requires only a low-voltage AC or DC input - save on installation costs!

1. Infrared safety beams or equivalent detection device must be fitted
2. Remote LED must be fitted
3. Onboard receiver must be used, or external access control device such as a keypad or keyswitch must be fitted
4. Pillar Lights/Pre-flashing Warning Light must be fitted

D2 Turbo controller



D2 Turbo Low-voltage controller



Steel, Nylon RAZ or Nylon angle rack
A variety of rack available in different lengths, for different strengths



CENTURION Infrared beams
Always recommended on any gate automation installation



P36
Passive sensitive edge provides additional protection against crushing



G-ULTRA GSM device
The ultimate new GSM solution for monitoring and activating the operator via your mobile phone



SMARTGUARDair keypad
Cost-effective and versatile wired and wireless keypad, allowing access to pedestrians



Plug-in step-down transformer
The perfect power solution for your D2 Turbo Low-Voltage



CENTURION transmitters
Available in one-, two-, three- and four-button variants. Incorporates code-hopping encryption



Backup memory module
Back up all the transmitters and operating details set up in the controller



G-SPEAK ULTRA
Infused with the DNA of innovation, the G-SPEAK ULTRA allows wireless communication between the user and the intercom gate station, effectively turning the user's phone into the intercom handset



Wheel kits
A variety of wheel kits are available from your CENTURION dealer



Solar supply
Alternative means of powering the system - consult your CENTURION dealer



Gooseneck
Steel pole for mounting intercom gate station or access control reader



SOLO/Lattice proximity access control system
Proximity reader allowing for access to both pedestrians and vehicles



Theft-resistant cage
This 304 grade brushed stainless steel cage increases the resistance of the motor against theft (motor not included)



Theft-resistant nut and disc padlock
High security has never been so simple! This kit maximises theft-resistance of the installation

TECHNICAL SPECIFICATIONS

	D2 Turbo		D2 Turbo Low-voltage	
Input voltage ¹	90V - 240V AC ± 10%, 50Hz		10V - 20V AC 10V - 28V DC	
Voltage output: 13.76V DC				
Battery charger amperage output (dependant on PSU input voltage)	90V AC input	1A output	10V AC input 20V AC input	400mA output 1A output
	240V AC input	1.2A output	10V DC input 28V DC input	200mA output 1A output
Motor voltage	12V DC			
Motor power supply ²	Battery-driven (standard capacity - 12V 5Ah)			
Current consumption (mains)	70mA		NA	
Current consumption (motor at rated load)	8A			
Motor push force - starting	18kgf			
Motor push force - rated	9kgf			
Gate mass - maximum	250kg			
Gate length - maximum	20m			
Gate speed (varies with load) ³	24m/min			
Manual Override	Lockable with key release			
Life expectancy of electric motor	10 years (based on 10 operations per day)			
Duty cycle - mains present ⁴	10%			
Operations in standby with 5Ah battery				
Half day ⁵	60			
Full day ⁵	40			
Collision sensing	Electronic			
Operating temperature range	-15°C to +50°C			
Onboard receiver type	Code-hopping multichannel receiver with selective add and delete			
Receiver code storage capacity	32 transmitter buttons			
Receiver frequency	433MHz			
Mass of unit packed (with standard kit but excl. rack and battery)	4.83kg			
Packaging dimensions (with standard kit but excl. rack and battery)	255mm wide x 188mm deep x 333mm high			


1. Can operate off a solar supply, consult your local dealer for assistance
2. Can increase battery capacity to 7Ah for longer standby times
3. Gate operating speed can be configured to run slower depending on the requirements of individual installations
4. Based on 25°C ambient temperature and unit not in direct sunlight; based on an operator push force of less than 50% of rated
5. Based on four metre gate, excluding infrared beams

Cabling requirements for D2 Turbo Low-voltage motor

The diameter of the cable needed to supply power to the system will depend on the distance between the transformer and the motor, as well as on the output voltage of the transformer used. The table below shows the typical cable thicknesses for corresponding distance and assumes a 16V AC transformer output.

Distance from transformer to motor	Minimum cable thickness required
Up to 20m	1mm ²
20m - 40m	1.5mm ²
40m - 60m	2.5mm ²

OVERALL DIMENSIONS

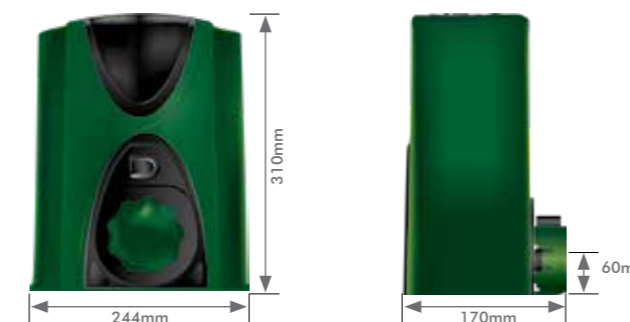

DOMESTIC SLIDING GATE OPERATORS

A high-speed, cost-effective operator. Exceptionally quick and easy to install



Prepare for your sliding gate to be turbo-charged!


A 12V DC battery revs the **D2 Turbo** up to 9000 rpm so it'll move gates weighing up to 250 kilograms at up to 24 metres per minute. Now that's fast...

Sleek, strong, stylish – and even eco-conscious – this gate motor has it all.

No mains power at your gate? No problem! The feature-rich and cost-effective **D2 Turbo Low-Voltage** domestic gate motor only requires a low-voltage AC or DC input to give life to its powerful DC motor.

The **D2 Turbo** combines easy installation, built-in Battery Backup, Adaptive Collision Sensing and CENTURION's 24 month carry-in warranty to provide you with the perfect domestic sliding gate solution.

MAIN FEATURES




Choose your speed

Select the Low Speed Profile to make sure your kids and pets are even safer. Alternatively, kick it into high gear with the **D2 Turbo**'s High Speed Profile to open and close your gate in the blink of an eye. Any criminals trying to follow you had better be quick.



Always on-guard

Reliable Battery Backup ensures that the **D2 Turbo** remains on high-alert, come blackouts, brownouts or nights outs on the town. When you get home, your **D2 Turbo** will be standing by to let you in at the touch of a button. For extended standby power you can even upgrade the compact 5Ah battery to a 7Ah one.




Adaptive Collision Sensing

Even with the High Speed Profile engaged, our advanced Adaptive Collision Sensing system helps to ensure that your car and your family are out of harm's way.




Easy installation

The **D2 Turbo** really lives up to its name – even installation is fast. Fit the motor quickly, using a simple foundation plate and clever jacking system. Full access to mounting bolts, easy cable entry and plug-in terminals make finishing the job off even faster. For added reliability, your **D2 Turbo** has been equipped with a tough as-nails steel pinion so it can easily be retro-fitted and used to replace older motors.



Simple setup

The only thing quicker than installing the **D2 Turbo** is setting it up. Use one dial to select the function (e.g. Autoclose Timer) and the other dial to select the relevant option (e.g. ten seconds). Then push the button and voilà! It's ready to go.



Quick maintenance

The **D2 Turbo**'s integrated controller with an onboard receiver and charger complements its click-together modular design, and makes for lightning quick disassembly, replacement of parts and reassembly.



Stylish design


Small but tough – and good-looking too! The **D2 Turbo** is a worthy addition to any driveway.



Onboard multichannel receiver¹

What is speed without control? Map the buttons on the receiver so that any one button on your remote control can either open the gate fully for a car, partially for a pedestrian or activate Holiday Lockout Mode.

1. CENTURION code-hopping technology



Reliable operation

Just like every CENTURION product, you can count on the **D2 Turbo** to look after your home for a very long time. Advanced engineering polymers and smart design combine to create a motor that runs for over 30 000 cycles. That's around ten years of moving an average domestic gate!



Lockable, easy Manual Override

The **D2 Turbo** is strong – so you don't have to be. One quarter-turn of the Manual Override wheel and your gate's in Manual Mode. A lock-protected mechanism makes sure that it's not so easy for a criminal to do it!



Minimal materials used for construction - almost 100% recyclable

Tested in the factory, in the field, and then tested some more, the **D2 Turbo** has been optimised for maximum performance using minimal materials and they are amongst the first 'green' operators. Save the environment - fit a **D2 Turbo**!



Forever yours

We know that this compact companion will serve you well – year, after year, after year. So just like all other CENTURION products, your beautiful **D2 Turbo** motor also comes with a 24 month carry-in warranty for added peace of mind.



Compact, but TOUGH!

Built for speed and safety, this baby can quickly and safely move gates weighing up to 250 kilograms! Nothing's going to slow your **D2 Turbo** down.



Pick your profile

With Multiple Operating Profiles to choose from, your **D2 Turbo** can operate your gate the way YOU want it to. Choose from Standard, Open Only or Reversing Mode. This motor can handle them all – add Autoclose and PIRAC Modes and you've got the quickest, safest and smartest access automation on the block.

D2 Turbo Low-voltage



D2 Turbo

