

LOCINOX[®]

PRODUCT INFORMATION





VENUS

Motorised
gate closer



VIP wherever you go!

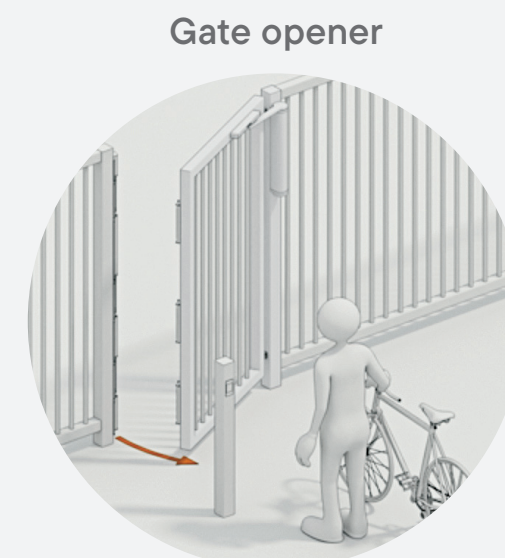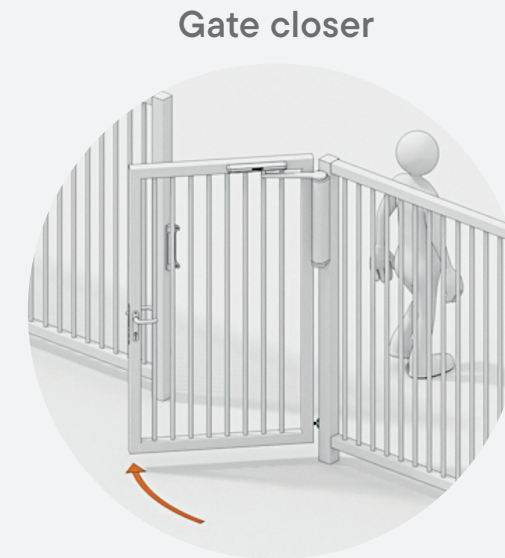

SCAN
FOR MORE
INFO

COMFORTABLE AND SECURE

The VENUS motorised gate closer is designed for pedestrian gates, offering both ease of use and enhanced security. With a light push, the gate opens automatically, thanks to the push & go feature – perfect for those with limited mobility or when carrying a bicycle. The gate closes automatically unless it encounters an obstacle. In that case, VENUS pauses before closing again.

DURABLE AND RELIABLE

Housed in a compact aluminium casing, the gate closer's 150 Nm motor ensures consistent performance in all weather conditions, even with heavy usage. The reversible brushless motor prevents blocking during forced openings or closings by impatient pedestrians, which reduces maintenance needs and extends the VENUS' lifespan.

EASY AND VERSATILE

VENUS is easy to install using QUICK-FIX, and it fits any gate with its three mounting arms. The fully integrated motor and control system make for a true plug-and-play installation. Once wired, an intuitive app guides you through the setup.

With configurable inputs and outputs, the gate closer easily integrates with other electrical accessories. Paired with any access control system, VENUS upgrades to a gate opener that requires no extra safety measures in low-energy mode.





Venus

Motorised gate closer for pedestrian gates

The VENUS motorised gate closer is specifically designed for pedestrian gates up to 1400 mm and 100 kg.

VENUS is a brushless motor specially designed for semi-manual or fully automated outdoor use.

What makes it special?

- Safe, reliable operation thanks to low-energy speed control and integrated obstacle detection
- All-in-one gate operator with integrated power supply and circuit board, input/output connectors and indicator light
- Easy setup with free mobile app



+32 (0)56 77 27 66, locinox.com
Locinox nv, Brabantstraat 107, 8790 Waregem

Features

Product size:	↔ 79 mm ↑ 509 mm ↗ 80 mm
Gate type:	Swing gates, reversible left and right Maximum width: 1400 mm Maximum weight: 100 kg
Posts:	Square - 80 mm 60 mm with adapterplate
Case:	Anodised aluminium
Opening angle:	up to 175°
Mounting:	Quick-fix
Arm types:	VENUS-ARM-S VENUS-ARM-A VENUS-ARM-G
Motor torque:	Max 150 Nm
Power supply:	110 - 240 V AC
Weather conditions:	-30°C → +70°C
Colour	RAL 9005 or silver
Warranty	2 years 3 years (application registration)
Tested	500K cycles